

## TECHNICAL SPECIFICATIONS

# B6BMMX Series

### Air Handler Residential System 18,000 - 60,000 Btuh (Heat Pump & Air Conditioner)


The B6BMMX series of air handlers, when combined with our heat pump or air conditioner, offer a full line of quality, split system heating and cooling equipment.




## FEATURES and BENEFITS

- **Durable, Attractive Cabinet:** Designed using galvanized steel. The door is also galvanized steel, with a polyester urethane finish. The 950 hour salt spray finish resists corrosion 50% better than comparable units. The plastic drain pan is corrosion-resistant.
- **Multi-poised:** Can be used in horizontal, upflow, downflow and vertical applications.
- **Multi-speed:** Gives flexibility of installation.
- **Ease-of-Service:** Plug-in wire connections and built-in filter rack makes the air handler easy to service.
- **Plug-in Heater Kits:** Available in 5kw - 30kw (Not for use in 115 Volt units)
- **Circuit Board:** Incorporating blower time delay relay, low voltage terminal strip, and heat-strip sequencing.
- **Air Handler Control Board:** Controls time-sequencing of heat stages.
- **Breaker Accessibility:** Breaker accessible from front of unit when heater is applied.
- **No Fasteners on Sides or Back:** Smooth surfaces for ease of installation.
- **Cabinet Insulation:** 1" insulation with an R-value of 4.2 contributes to quiet operation and prevents cabinet sweating in difficult applications.
- **Designed to meet the requirements 610.2.A.2:** Meets Florida building code requirements for air leakage.
- **Micro-Channel Evaporator Coil:** All aluminum design to prevent leaks caused by corrosion formicary.

MODEL IDENTIFICATION CODE

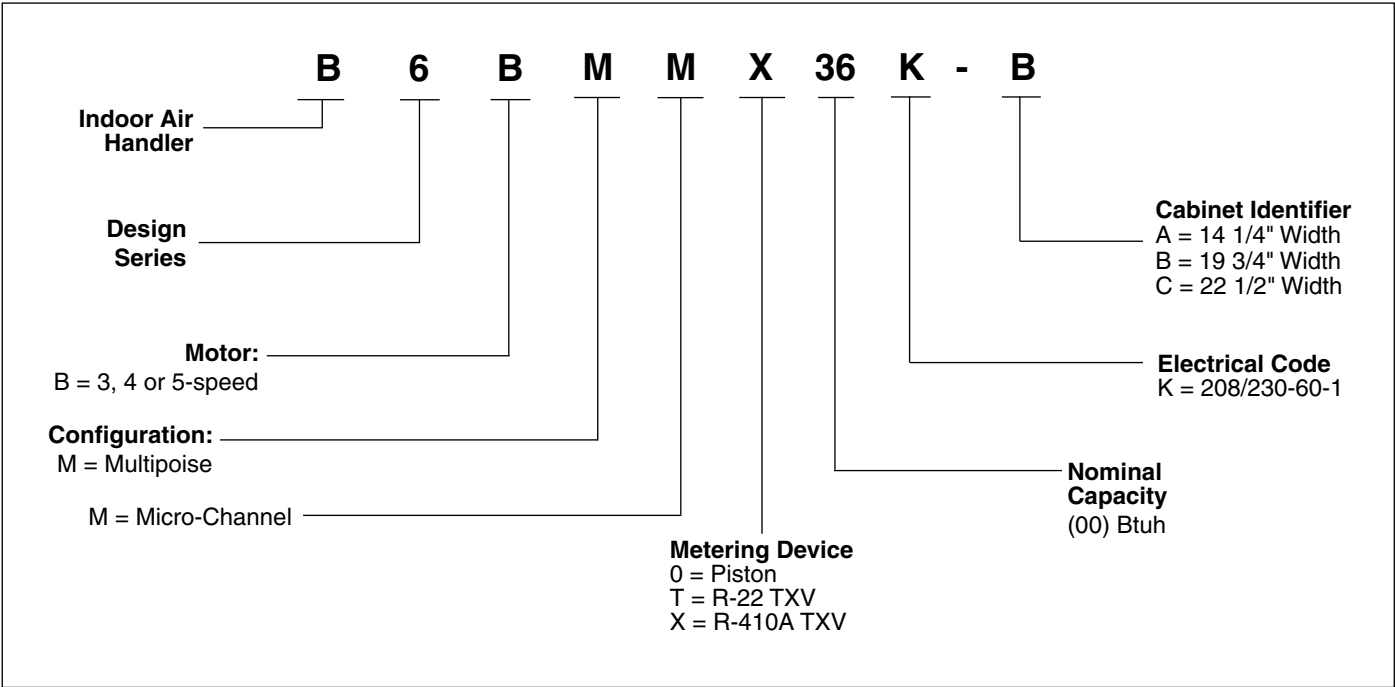

DIMENSIONS

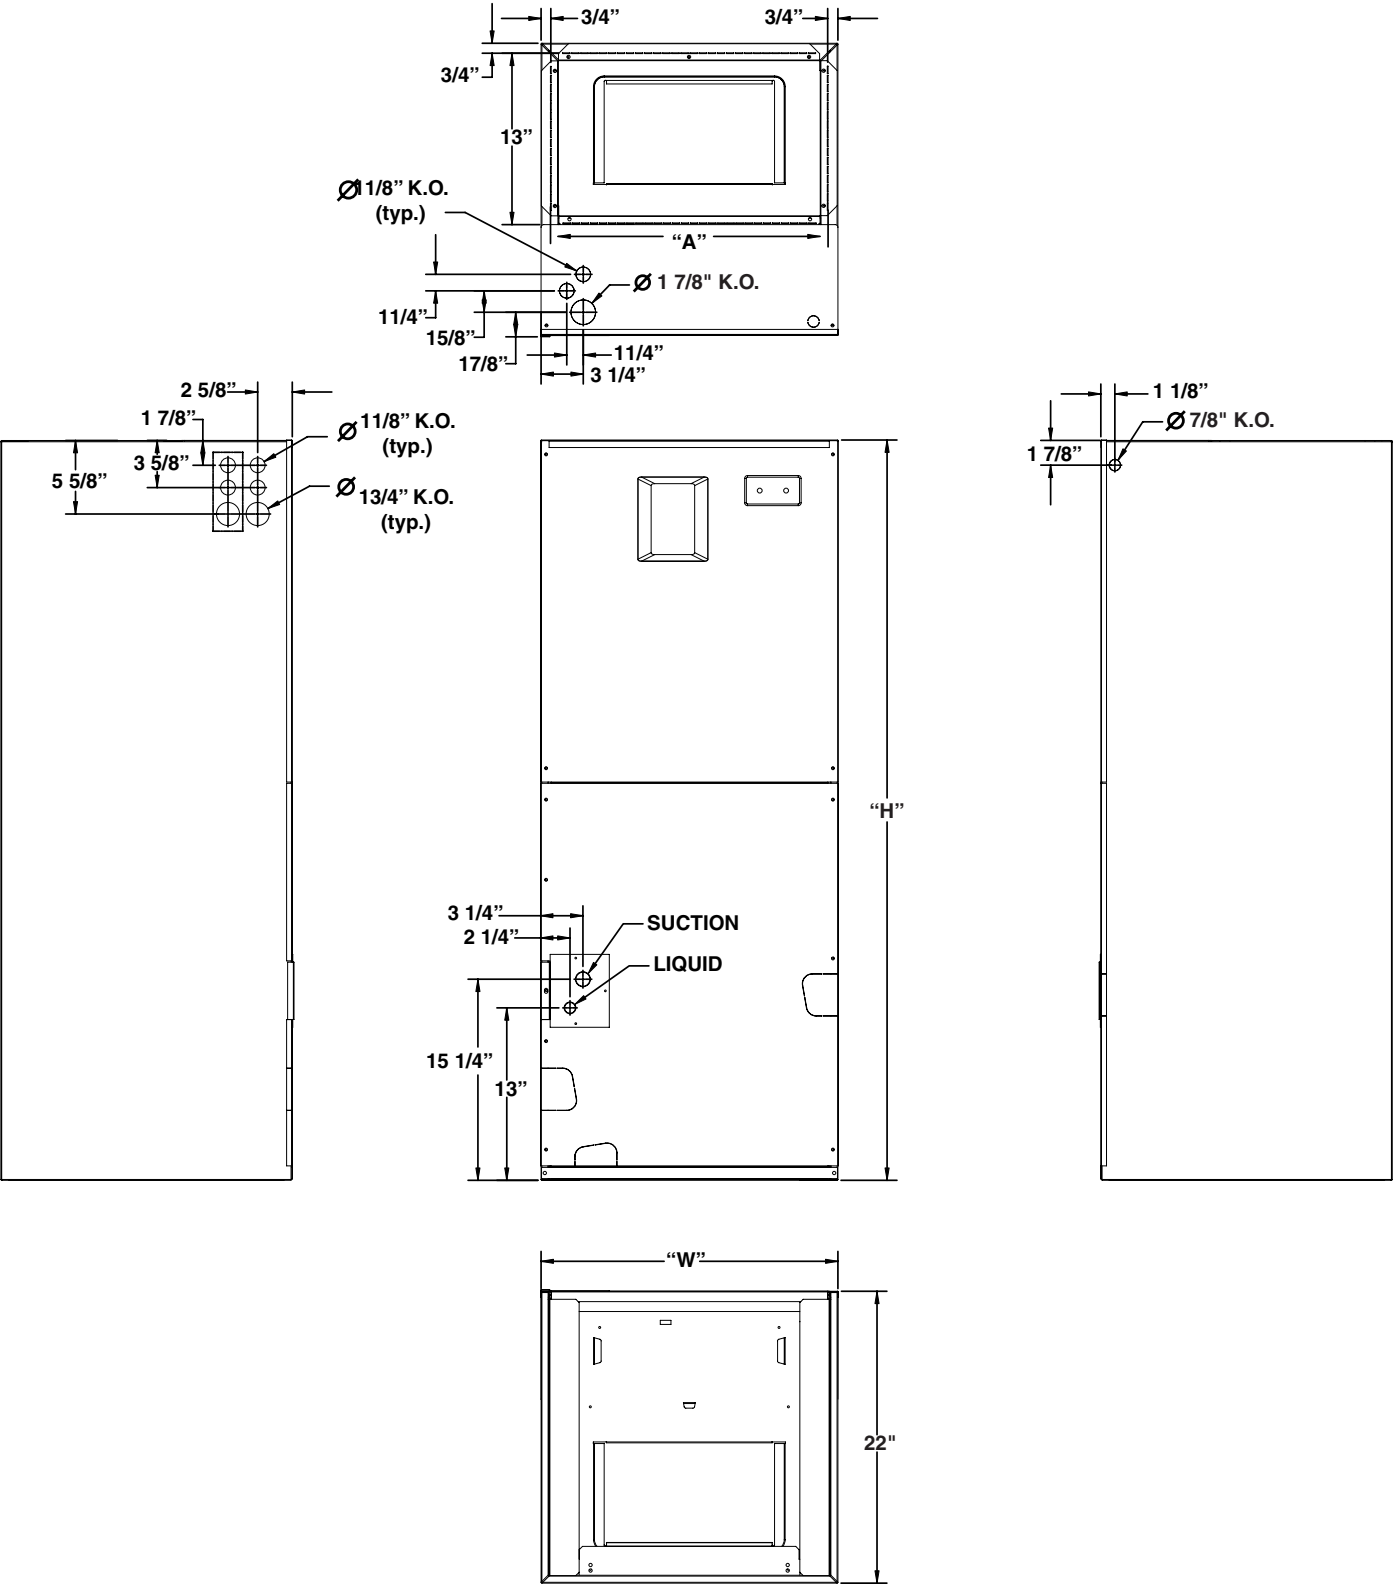

## SPECIFICATIONS

| Model Number B6BMM                                       | X24K-A          | X30K-A          | X24K-B          | X30K-B          | X36K-B          | X42K-B          | X48K-C      | X60K-C      |
|----------------------------------------------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-------------|-------------|
| Nominal cooling capacity - BTUh <sup>1</sup>             | 24000           | 30000           | 24000           | 30000           | 36000           | 42000           | 48000       | 60000       |
| Orifice size                                             | TXV             | TXV             | TXV             | TXV             | TXV             | TXV             | TXV         | TXV         |
| Maximum Available Auxiliary Heat                         | 15              | 15              | 20              | 20              | 20              | 20              | 30          | 30          |
| Nominal Blower Size (Dia. x Width)                       | 10 x 6          | 10 x 6          | 10 x 8          | 10 x 8          | 10 x 8          | 10 x 8          | 10 x 10     | 11 x 10     |
| Motor Hp-speeds-type                                     | 1/5-3-PSC       | 1/2-3-PSC       | 1/5-3-PSC       | 1/3-3-PSC       | 1/3-3-PSC       | 1/3-3-PSC       | 1/2-3-PSC   | 3/4-16-BDC  |
| Filter Size (supplied internal filter rack) <sup>2</sup> | 12x20x1         | 12x20x1         | 18x20x1         | 18x20x1         | 18x20x1         | 18x20x1         | 20x20x1     | 20x20x1     |
| Approximate Shipping Weight, lbs                         | 87              | 90              | 107             | 110             | 110             | 130             | 150         | 155         |
| Height, "H", in.                                         | 43-5/16         | 43-5/16         | 43-5/16         | 43-5/16         | 49-5/16         | 49-5/16         | 55-15/16    | 55-15/16    |
| Width, "W", in.                                          | 14-3/16         | 14-3/16         | 19-11/16        | 19-11/16        | 19-11/16        | 19-11/16        | 22-7/16     | 22-7/16     |
| Supply Air Outlet Dimension, in.                         | 12-7/8 x 12-3/4 | 12-7/8 x 12-3/4 | 12-7/8 x 18-1/4 | 12-7/8 x 18-1/4 | 12-7/8 x 18-1/4 | 12-7/8 x 18-1/4 | 12-7/8 x 21 | 12-7/8 x 21 |
| Ref. Connection Sizes, in. (suc./liq.)                   | 3/4 - 3/8       | 3/4 - 3/8       | 3/4 - 3/8       | 3/4 - 3/8       | 3/4 - 3/8       | 7/8 - 3/8       | 7/8 - 3/8   | 7/8 - 3/8   |

<sup>1</sup> See current AHRI Directory for certified combinations and ratings.

<sup>2</sup> Filter is not supplied with unit.

# ELECTRICAL DATA

| Cabinet | Capacity | Model Number H6HK- | Voltage 240       |           |           |                |                             |           |           |                | Voltage 208       |           |           |                |                             |           |           |                |
|---------|----------|--------------------|-------------------|-----------|-----------|----------------|-----------------------------|-----------|-----------|----------------|-------------------|-----------|-----------|----------------|-----------------------------|-----------|-----------|----------------|
|         |          |                    | Min. Circuit Amp. |           |           |                | Maximum Over-current Rating |           |           |                | Min. Circuit Amp. |           |           |                | Maximum Over-current Rating |           |           |                |
|         |          |                    | Circuit A         | Circuit B | Circuit C | Single Circuit | Circuit A                   | Circuit B | Circuit C | Single Circuit | Circuit A         | Circuit B | Circuit C | Single Circuit | Circuit A                   | Circuit B | Circuit C | Single Circuit |
| A       | 24       | NONE               | 1.6               | -         | -         | 1.6            | 15.0                        | -         | -         | 15.0           | 1.6               | -         | -         | 1.6            | 15.0                        | -         | -         | 15.0           |
|         |          | 005H-XX            | 26.6              | -         | -         | 26.6           | 30.0                        | -         | -         | 30.0           | 23.3              | -         | -         | 23.3           | 25.0                        | -         | -         | 25.0           |
|         |          | 008H-XX            | 41.2              | -         | -         | 41.2           | 45.0                        | -         | -         | 45.0           | 35.9              | -         | -         | 35.9           | 40.0                        | -         | -         | 40.0           |
|         |          | 010H-XX            | 51.6              | -         | -         | 51.6           | 60.0                        | -         | -         | 60.0           | 45.0              | -         | -         | 45.0           | 45.0                        | -         | -         | 45.0           |
|         |          | 009Q-XX            | -                 | -         | -         | 28.7           | -                           | -         | -         | 30.0           | -                 | -         | -         | 18.8           | -                           | -         | -         | 30.0           |
| B       | 24       | None               | 1.6               | -         | -         | 1.6            | 15.0                        | -         | -         | 15.0           | 1.6               | -         | -         | 1.6            | 15.0                        | -         | -         | 15.0           |
|         |          | 005H-XX            | 26.6              | -         | -         | 26.6           | 30.0                        | -         | -         | 30.0           | 23.3              | -         | 0.0       | 23.3           | 25.0                        | -         | -         | 25.0           |
|         |          | 008H-XX            | 41.2              | -         | -         | 41.2           | 45.0                        | -         | -         | 45.0           | 35.9              | -         | -         | 35.9           | 40.0                        | -         | -         | 40.0           |
|         |          | 010H-XX            | 51.6              | -         | -         | 51.6           | 60.0                        | -         | -         | 60.0           | 45.0              | -         | -         | 45.0           | 45.0                        | -         | -         | 45.0           |
|         |          | 009Q-XX            | -                 | -         | -         | 28.7           | -                           | -         | -         | 30.0           | -                 | -         | -         | 18.8           | -                           | -         | -         | 30.0           |
| A       | 30       | None               | 3.1               | -         | -         | 3.1            | 15.0                        | -         | -         | 15.0           | 3.1               | -         | -         | 3.1            | 15.0                        | -         | -         | 15.0           |
|         |          | 005H-XX            | 28.1              | -         | -         | 28.1           | 30.0                        | -         | -         | 30.0           | 24.8              | -         | -         | 24.8           | 25.0                        | -         | -         | 25.0           |
|         |          | 008H-XX            | 42.7              | -         | -         | 42.7           | 45.0                        | -         | -         | 45.0           | 37.4              | -         | -         | 37.4           | 40.0                        | -         | -         | 40.0           |
|         |          | 010H-XX            | 53.1              | -         | -         | 53.1           | 60.0                        | -         | -         | 60.0           | 46.5              | -         | -         | 46.5           | 50.0                        | -         | -         | 50.0           |
|         |          | 015H-XX            | 53.1              | 25.0      | -         | 65.6           | 60.0                        | 30.0      | -         | 80.0           | 46.5              | 21.7      | -         | 68.1           | 50.0                        | 25.0      | -         | 70.0           |
|         |          | 009Q-XX            | -                 | -         | -         | 30.2           | -                           | -         | -         | 35.0           | -                 | -         | -         | 26.6           | -                           | -         | -         | 30.0           |
|         |          | 015Q-XX            | -                 | -         | -         | 46.4           | -                           | -         | -         | 50.0           | -                 | -         | -         | 40.6           | -                           | -         | -         | 45.0           |
| B       | 30/36    | None               | 2.6               | -         | -         | 2.6            | 15.0                        | -         | -         | 15.0           | 2.6               | -         | -         | 2.6            | 15.0                        | -         | -         | 15.0           |
|         |          | 005H-XX            | 27.6              | -         | -         | 27.6           | 30.0                        | -         | -         | 30.0           | 24.3              | -         | -         | 24.3           | 25.0                        | -         | -         | 25.0           |
|         |          | 008H-XX            | 42.2              | -         | -         | 42.2           | 45.0                        | -         | -         | 45.0           | 36.9              | -         | -         | 36.9           | 40.0                        | -         | -         | 40.0           |
|         |          | 010H-XX            | 52.6              | -         | -         | 52.6           | 60.0                        | -         | -         | 60.0           | 46.0              | -         | -         | 46.0           | 50.0                        | -         | -         | 50.0           |
|         |          | 015H-XX            | 52.6              | 25.0      | -         | 64.7           | 60.0                        | 30.0      | -         | 80.0           | 46.0              | 21.7      | -         | 67.6           | 50.0                        | 25.0      | -         | 70.0           |
|         |          | 020H-XX            | 52.6              | 50.0      | -         | 102.6          | 60.0                        | 60.0      | -         | 110.0          | 46.0              | 43.3      | -         | 89.3           | 50.0                        | 45.0      | -         | 90.0           |
|         |          | 009Q-XX            | -                 | -         | -         | 29.7           | -                           | -         | -         | 30.0           | -                 | -         | -         | 26.1           | -                           | -         | -         | 30.0           |
|         |          | 015Q-XX            | -                 | -         | -         | 45.9           | -                           | -         | -         | 50.0           | -                 | -         | -         | 40.2           | -                           | -         | -         | 45.0           |
|         |          | 015Q-XX            | -                 | -         | -         | 45.9           | -                           | -         | -         | 50.0           | -                 | -         | -         | 40.2           | -                           | -         | -         | 45.0           |
| B       | 42       | None               | 3.1               | -         | -         | 3.1            | 15.0                        | -         | -         | 15.0           | 3.1               | -         | -         | 3.1            | 15.0                        | -         | -         | 15.0           |
|         |          | 005H-XX            | 28.1              | -         | -         | 28.1           | 30.0                        | -         | -         | 30.0           | 24.8              | -         | -         | 24.8           | 25.0                        | -         | -         | 25.0           |
|         |          | 008H-XX            | 42.7              | -         | -         | 42.7           | 45.0                        | -         | -         | 45.0           | 37.4              | -         | -         | 37.4           | 40.0                        | -         | -         | 40.0           |
|         |          | 010H-XX            | 53.1              | -         | -         | 53.1           | 60.0                        | -         | -         | 60.0           | 46.5              | -         | -         | 46.5           | 50.0                        | -         | -         | 50.0           |
|         |          | 015H-XX            | 53.1              | 25.0      | -         | 65.6           | 60.0                        | 30.0      | -         | 80.0           | 46.5              | 21.7      | -         | 68.1           | 50.0                        | 25.0      | -         | 70.0           |
|         |          | 020H-XX            | 53.1              | 50.0      | -         | 103.1          | 60.0                        | 60.0      | -         | 110.0          | 46.5              | 43.3      | -         | 89.8           | 50.0                        | 45.0      | -         | 90.0           |
|         |          | 009Q-XX            | -                 | -         | -         | 30.2           | -                           | -         | -         | 35.0           | -                 | -         | -         | 26.6           | -                           | -         | -         | 30.0           |
|         |          | 015Q-XX            | -                 | -         | -         | 46.4           | -                           | -         | -         | 50.0           | -                 | -         | -         | 40.7           | -                           | -         | -         | 45.0           |
|         |          | 015Q-XX            | -                 | -         | -         | 46.4           | -                           | -         | -         | 50.0           | -                 | -         | -         | 40.7           | -                           | -         | -         | 45.0           |
| C       | 48       | None               | 5.4               | -         | -         | 5.4            | 15.0                        | -         | -         | 15.0           | 5.4               | -         | -         | 5.4            | 15.0                        | -         | -         | 15.0           |
|         |          | 005H-XX            | 30.4              | -         | -         | 30.4           | 35.0                        | -         | -         | 35.0           | 27.0              | -         | -         | 27.0           | 30.0                        | -         | -         | 30.0           |
|         |          | 008H-XX            | 45.0              | -         | -         | 45.0           | 45.0                        | -         | -         | 45.0           | 39.7              | -         | -         | 39.7           | 40.0                        | -         | -         | 40.0           |
|         |          | 010H-XX            | 55.4              | -         | -         | 55.4           | 60.0                        | -         | -         | 60.0           | 48.7              | -         | -         | 48.7           | 50.0                        | -         | -         | 50.0           |
|         |          | 015H-XX            | 55.4              | 25.0      | -         | 80.4           | 60.0                        | 30.0      | -         | 90.0           | 48.7              | 21.7      | -         | 70.4           | 50.0                        | 25.0      | -         | 80.0           |
|         |          | 020H-XX            | 55.4              | 50.0      | -         | 105.4          | 60.0                        | 60.0      | -         | 110.0          | 48.7              | 43.3      | -         | 92.0           | 50.0                        | 45.0      | -         | 100.0          |
|         |          | 025H-XX            | 55.4              | 50.0      | 25.0      | 130.4          | 60.0                        | 60.0      | 60.0      | 150.0          | 48.7              | 43.3      | 21.7      | 113.7          | 50.0                        | 45.0      | 45.0      | 125.0          |
|         |          | 030H-XX            | 55.4              | 50.0      | 50.0      | 155.4          | 60.0                        | 60.0      | 60.0      | 175.0          | 48.7              | 43.3      | 43.3      | 135.4          | 50.0                        | 45.0      | 45.0      | 150.0          |
|         |          | 009Q-XX            | -                 | -         | -         | 32.4           | -                           | -         | -         | 35.0           | -                 | -         | -         | 28.8           | -                           | -         | -         | 30.0           |
|         |          | 015Q-XX            | -                 | -         | -         | 48.7           | -                           | -         | -         | 50.0           | -                 | -         | -         | 42.9           | -                           | -         | -         | 45.0           |
| C       | 60       | None               | 6.3               | -         | -         | 6.3            | 15.0                        | -         | -         | 15.0           | 6.8               | -         | -         | 6.8            | 15.0                        | -         | -         | 15.0           |
|         |          | 005H-XX            | 31.3              | -         | -         | 31.3           | 35.0                        | -         | -         | 35.0           | 28.4              | -         | -         | 28.4           | 30.0                        | -         | -         | 30.0           |
|         |          | 008H-XX            | 45.8              | -         | -         | 45.8           | 50.0                        | -         | -         | 50.0           | 41.1              | -         | -         | 41.1           | 45.0                        | -         | -         | 45.0           |
|         |          | 010H-XX            | 56.3              | -         | -         | 56.3           | 60.0                        | -         | -         | 60.0           | 50.1              | -         | -         | 50.1           | 60.0                        | -         | -         | 60.0           |
|         |          | 015H-XX            | 56.3              | 25.0      | -         | 81.3           | 60.0                        | 30.0      | -         | 90.0           | 50.1              | 21.7      | -         | 71.8           | 60.0                        | 25.0      | -         | 80.0           |
|         |          | 020H-XX            | 56.3              | 50.0      | -         | 106.3          | 60.0                        | 60.0      | -         | 110.0          | 50.1              | 43.3      | -         | 93.4           | 60.0                        | 45.0      | -         | 100.0          |
|         |          | 025H-XX            | 56.3              | 50.0      | 25.0      | 131.3          | 60.0                        | 60.0      | 30.0      | 150.0          | 50.1              | 43.3      | 21.7      | 115.1          | 60.0                        | 45.0      | 25.0      | 125.0          |
|         |          | 030H-XX            | 56.3              | 50.0      | 50.0      | 156.3          | 60.0                        | 60.0      | 60.0      | 175.0          | 50.1              | 43.3      | 43.3      | 136.8          | 60.0                        | 45.0      | 45.0      | 150.0          |
|         |          | 009Q-XX            | -                 | -         | -         | 33.3           | -                           | -         | -         | 35.0           | -                 | -         | -         | 30.2           | -                           | -         | -         | 35.0           |
|         |          | 015Q-XX            | -                 | -         | -         | 49.6           | -                           | -         | -         | 50.0           | -                 | -         | -         | 44.3           | -                           | -         | -         | 45.0           |
|         |          | 015Q-XX            | -                 | -         | -         | 49.6           | -                           | -         | -         | 50.0           | -                 | -         | -         | 44.3           | -                           | -         | -         | 45.0           |
|         |          | 015Q-XX            | -                 | -         | -         | 49.6           | -                           | -         | -         | 50.0           | -                 | -         | -         | 44.3           | -                           | -         | -         | 45.0           |

# BLOWER PERFORMANCE DATA

| Dry Coil ESP                   |                            | 0.10 | 0.20 | 0.30 | 0.40 | 0.50 | 0.60 | 0.70 | 0.80 |
|--------------------------------|----------------------------|------|------|------|------|------|------|------|------|
| <b>*24K,<br/>A-Cabinet</b>     | Low                        | 683  | 647  | 607  | 563  | 515  | 463  | 406  | 345  |
|                                | Corrected ESP <sup>1</sup> | 0.00 | 0.07 | 0.19 | 0.30 | 0.42 | 0.53 | 0.65 | 0.76 |
|                                | Medium                     | 861  | 823  | 781  | 734  | 682  | 625  | 564  | 498  |
|                                | Corrected ESP <sup>1</sup> | 0.00 | 0.00 | 0.11 | 0.23 | 0.36 | 0.48 | 0.60 | 0.72 |
|                                | High                       | 1072 | 1026 | 975  | 920  | 860  | 797  | 730  | 659  |
|                                | Corrected ESP <sup>1</sup> | 0.00 | 0.00 | 0.00 | 0.14 | 0.27 | 0.40 | 0.53 | 0.67 |
| <b>*30/*36K,<br/>A-Cabinet</b> | Low                        | 849  | 825  | 793  | 753  | 704  | 647  | 581  | 508  |
|                                | Corrected ESP <sup>1</sup> | 0.00 | 0.04 | 0.15 | 0.27 | 0.38 | 0.50 | 0.62 | 0.74 |
|                                | Medium                     | 1118 | 1087 | 1046 | 997  | 940  | 874  | 799  | 717  |
|                                | Corrected ESP <sup>1</sup> | 0.00 | 0.00 | 0.04 | 0.17 | 0.29 | 0.42 | 0.55 | 0.68 |
|                                | High                       | 1277 | 1233 | 1184 | 1130 | 1070 | 1005 | 935  | 860  |
|                                | Corrected ESP <sup>1</sup> | 0.00 | 0.00 | 0.00 | 0.10 | 0.23 | 0.36 | 0.49 | 0.63 |
| <b>*24K,<br/>B-Cabinet</b>     | Low                        | 708  | 690  | 664  | 628  | 584  | 532  | 471  | 401  |
|                                | Corrected ESP <sup>1</sup> |      | 0.08 | 0.19 | 0.30 | 0.41 | 0.53 | 0.64 | 0.76 |
|                                | Medium                     | 909  | 904  | 886  | 854  | 810  | 753  | 683  | 600  |
|                                | Corrected ESP <sup>1</sup> |      |      | 0.10 | 0.22 | 0.33 | 0.46 | 0.58 | 0.71 |
|                                | High                       | 1118 | 1132 | 1126 | 1101 | 1056 | 992  | 908  | 805  |
|                                | Corrected ESP <sup>1</sup> |      |      |      | 0.09 | 0.22 | 0.35 | 0.49 | 0.64 |
| <b>*30/*36K,<br/>B-Cabinet</b> | Low                        | 953  | 915  | 871  | 821  | 764  | 701  | 631  | 555  |
|                                | Corrected ESP <sup>1</sup> | 0.00 | 0.04 | 0.16 | 0.27 | 0.39 | 0.51 | 0.62 | 0.74 |
|                                | Medium                     | 1265 | 1232 | 1188 | 1133 | 1067 | 991  | 903  | 805  |
|                                | Corrected ESP <sup>1</sup> | 0.00 | 0.00 | 0.03 | 0.15 | 0.28 | 0.41 | 0.54 | 0.68 |
|                                | High                       | 1427 | 1385 | 1333 | 1270 | 1196 | 1113 | 1018 | 913  |
|                                | Corrected ESP <sup>1</sup> | 0.00 | 0.00 | 0.00 | 0.09 | 0.23 | 0.36 | 0.50 | 0.64 |
| <b>*42K,<br/>B-Cabinet</b>     | Low                        | 1324 | 1302 | 1271 | 1233 | 1187 | 1134 | 1072 | 1003 |
|                                | Corrected ESP <sup>1</sup> | 0.00 | 0.06 | 0.17 | 0.27 | 0.38 | 0.49 | 0.61 | 0.72 |
|                                | Medium                     | 1485 | 1455 | 1418 | 1373 | 1320 | 1260 | 1193 | 1118 |
|                                | Corrected ESP <sup>1</sup> | 0.00 | 0.00 | 0.13 | 0.24 | 0.36 | 0.47 | 0.58 | 0.70 |
|                                | High                       | 1637 | 1601 | 1558 | 1506 | 1447 | 1380 | 1305 | 1223 |
|                                | Corrected ESP <sup>1</sup> | 0.00 | 0.00 | 0.00 | 0.21 | 0.33 | 0.44 | 0.56 | 0.68 |
| <b>*48K,<br/>C-Cabinet</b>     | Low                        | 1605 | 1606 | 1592 | 1565 | 1524 | 1468 | 1399 | 1316 |
|                                | Corrected ESP <sup>1</sup> | 0    | 0.11 | 0.21 | 0.31 | 0.42 | 0.52 | 0.63 | 0.74 |
|                                | Medium                     | 1977 | 1939 | 1890 | 1830 | 1758 | 1675 | 1580 | 1474 |
|                                | Corrected ESP <sup>1</sup> | 0    | 0    | 0.18 | 0.28 | 0.39 | 0.50 | 0.61 | 0.72 |
|                                | High                       | 2264 | 2182 | 2095 | 2003 | 1906 | 1805 | 1698 | 1586 |
|                                | Corrected ESP <sup>1</sup> | 0    | 0    | 0    | 0.26 | 0.37 | 0.49 | 0.60 | 0.71 |

<sup>1</sup> ESP estimate with wet coil and filter

## Notes:

- 1) Airflow is shown in cfm, +/- 5%.
- 2) External static pressure (ESP) is shown in inches w.c.
- 3) See unit nameplate or installation instructions for maximum recommended external static pressure.

|                            | Switch Setting |     |     |     | Cooling or Heating Airflow (CFM) |      |      |      |      |      |      |      |
|----------------------------|----------------|-----|-----|-----|----------------------------------|------|------|------|------|------|------|------|
|                            |                |     |     |     | Dry Coil ESP                     |      |      |      |      |      |      |      |
|                            | 1/5            | 2/6 | 3/7 | 4/8 | 0.1                              | 0.2  | 0.3  | 0.4  | 0.5  | 0.6  | 0.7  | 0.8  |
| <b>*60K,<br/>C-Cabinet</b> | 0              | 0   | 0   | 0   | 710                              | 580  | 395  |      |      |      |      |      |
|                            | 1              | 0   | 0   | 0   | 830                              | 690  | 675  | 530  | 505  |      |      |      |
|                            | 0              | 1   | 0   | 0   | 930                              | 875  | 710  | 665  | 560  | 530  |      |      |
|                            | 1              | 1   | 0   | 0   | 1065                             | 1015 | 900  | 840  | 800  | 705  | 665  | 635  |
|                            | 0              | 0   | 1   | 0   | 1185                             | 1115 | 1010 | 960  | 925  | 875  | 830  | 745  |
|                            | 1              | 0   | 1   | 0   | 1275                             | 1220 | 1175 | 1120 | 1060 | 970  | 930  | 890  |
|                            | 0              | 1   | 1   | 0   | 1365                             | 1350 | 1255 | 1200 | 1150 | 1105 | 1060 | 1025 |
|                            | 1              | 1   | 1   | 0   | 1480                             | 1430 | 1370 | 1325 | 1265 | 1225 | 1185 | 1140 |
|                            | 0              | 0   | 0   | 1   | 1560                             | 1535 | 1485 | 1430 | 1375 | 1335 | 1285 | 1240 |
|                            | 1              | 0   | 0   | 1   | 1650                             | 1600 | 1545 | 1500 | 1450 | 1405 | 1360 | 1305 |
|                            | 0              | 1   | 0   | 1   | 1730                             | 1685 | 1660 | 1610 | 1570 | 1520 | 1470 | 1420 |
|                            | 1              | 1   | 0   | 1   | 1785                             | 1740 | 1695 | 1645 | 1615 | 1545 | 1510 | 1470 |
|                            | 0              | 0   | 1   | 1   | 1865                             | 1820 | 1785 | 1750 | 1695 | 1655 | 1605 | 1560 |
|                            | 1              | 0   | 1   | 1   | 1920                             | 1890 | 1850 | 1805 | 1765 | 1715 | 1675 | 1640 |
|                            | 0              | 1   | 1   | 1   | 2010                             | 1965 | 1960 | 1900 | 1850 | 1810 | 1775 | 1730 |
|                            | 1              | 1   | 1   | 1   | 2065                             | 2020 | 1985 | 1955 | 1915 | 1880 | 1840 | 1810 |

NOTE: 0 = OFF, 1 = ON

## ACCESSORIES

| Accessory Kit Description                     | Cabinet Size |     |   | Order Number |
|-----------------------------------------------|--------------|-----|---|--------------|
|                                               | A            | B   | C |              |
| Down-flow adaptor kit                         | X            |     |   | 917342       |
|                                               |              | X   |   | 919321       |
|                                               |              |     | X | 919322       |
| Single circuit adaptor for 2 circuit breakers | X            | X   | X | 913874       |
| Single circuit adaptor for 3 circuit breakers | n/a          | n/a | X | 913556       |

### 240V Single-Phase Heater Kit Application

| Nominal KW | Matched Units |            |        |        |        |        |        |        | Order Number          |                          |
|------------|---------------|------------|--------|--------|--------|--------|--------|--------|-----------------------|--------------------------|
|            | *24K-A        | *30/*36K-A | *24K-B | *30K-B | *36K-B | *42K-B | *48K-C | *60K-C | With Circuit Breakers | Without Circuit Breakers |
| 5          | X             | X          | X      | X      | X      | X      | X      | X      | 904407                | 904406                   |
| 8          | X             | X          | X      | X      | X      | X      | X      | X      | 904409                | 904408                   |
| 10         | X             | X          | X      | X      | X      | X      | X      | X      | 904412                | 904411                   |
| 15         | n/a           | X          | n/a    | X      | X      | X      | X      | X      | 904414                | n/a                      |
| 20         | n/a           | n/a        | n/a    | X      | X      | X      | X      | X      | 904416                | n/a                      |
| 25         | n/a           | n/a        | n/a    | n/a    | n/a    | n/a    | X      | X      | 921609                | n/a                      |
| 30         | n/a           | n/a        | n/a    | n/a    | n/a    | n/a    | X      | X      | 921610                | n/a                      |

### 240V Three-Phase Heater Kit Application

| Nominal KW | Matched Units |            |        |        |        |        |        |        | Order Number          |                          |
|------------|---------------|------------|--------|--------|--------|--------|--------|--------|-----------------------|--------------------------|
|            | *24K-A        | *30/*36K-A | *24K-B | *30K-B | *36K-B | *42K-B | *48K-C | *60K-C | With Circuit Breakers | Without Circuit Breakers |
| 9          | X             | X          | X      | X      | X      | X      | X      | X      | 904410                | n/a                      |
| 15         | n/a           | X          | n/a    | X      | X      | X      | X      | X      | 904415                | n/a                      |



#### GENERAL TERMS OF LIMITED WARRANTY

NORDYNE will furnish a replacement for any part of this product which fails in normal use and service within the terms and conditions of the warranty.

For complete details of the Limited Warranty, including applicable terms and conditions, see your local installer or contact the NORDYNE warranty department for a copy.

**NORDYNE**  
COMPLETE COMFORT. GENUINE VALUE.

8000 Phoenix Parkway | O'Fallon, MO 63368-3827

Specifications and illustrations subject to change without notice and without incurring obligations. Printed in U.S.A (05/2014)

078E-0514