

MAYTAG

TECHNICAL SPECIFICATIONS

Model CSA4BD-KA/B Series



M1200 Product Line

**R-410A High Efficiency Air Conditioner
13 SEER — 1.5 - 5 Ton Capacity**

- **M1200 – 12 YEAR ALL PARTS LIMITED WARRANTY**
- **M1200 WITH UPGRADED WARRANTY PACKAGE - 12 YEAR ALL PARTS & LABOR LIMITED WARRANTY**
- **Both the standard and upgraded limited warranty packages offer a 12 Year Dependability Promise to replace the entire unit, if the unit's major component (heat exchanger or compressor) fails within the first 12 years of operation, to the original owner. All split system products must be installed with a matched indoor air handler or indoor coil to qualify.**
- **Product registration (by consumer or dealer) required for 12-year Warranty and Dependability Promise within a limited period of time after the installation. See current warranty document for details. This can be viewed at www.maytagvac.com or ask your sales representative.**
- **Dealer is responsible for registration of labor portion of warranty.**



Maytag now offers the choice of an air conditioner that uses a more efficient and environmentally friendly refrigerant designated R-410A. The CSA4BD-KA/B Series of air conditioners offers exceptional performance. The unit, when combined with our engineered coils or air handlers, offers a full line of quality, split system cooling equipment.


Features and Benefits

- **Smart Cool 410™ Refrigerant (R-410A)** – Earth friendly non-ozone depleting refrigerant.
- **Durable, Attractive Cabinet** – Designed using galvanized steel with a polyester urethane finish. The 950 hour salt spray finish is 1.5 mil thick and resists corrosion 50% better than comparable units.
- **Quiet Plus™ Sound Package** – Consists of a Quiet Plus™ Compressor Sound Blanket and a Swept Wing Fan Blade. Both have been engineered to significantly reduce unwanted noise.
- **Permanently Lubricated Motor** – A heavy duty PSC motor for long lasting reliability and quiet operation. Requires no maintenance and is completely protected from rain and snow.
- **Removable Top Grille Assembly** – Allows ease of service from the top without disconnecting fan motor leads.
- **Low Pressure Switch** – Loss of charge protection ensures long compressor life. Auto-reset feature prevents nuisance service visits.
- **High Pressure Switch** – Protects against abnormally high system pressures. Auto-reset feature prevents nuisance service visits.
- **Liquid Line Filter/Drier** – Included with unit, field installed.
- **One Piece Top/Orifice** – Designed for maximum airflow and quiet operation.
- **Easy Compressor and Control Access** – Designed to make servicing easier for the contractor, access panels are provided to all controls and the compressor from the side of the unit.
- **ComfortAlert™ Module** – Detects system and electrical problem conditions. A diagnostics key directs the service technician to the root cause of a problem.
- **Composite Base Pan** – Absorbs sound and is corrosion resistant. Composite is also stronger and lighter than steel.


DIMENSIONS/OUTDOOR SECTION

13 SEER — High Efficiency

CSA4BD-	018KA	024KB	030KB	036KB	042KA	048KA	060KA
H	24 1/4	24 1/4	28 1/4	28 1/4	33	33	45
W	23 1/4	23 1/4	23 1/4	23 1/4	31 1/4	31 1/4	31 1/4
D	23 1/4	23 1/4	23 1/4	23 1/4	31 1/4	31 1/4	31 1/4

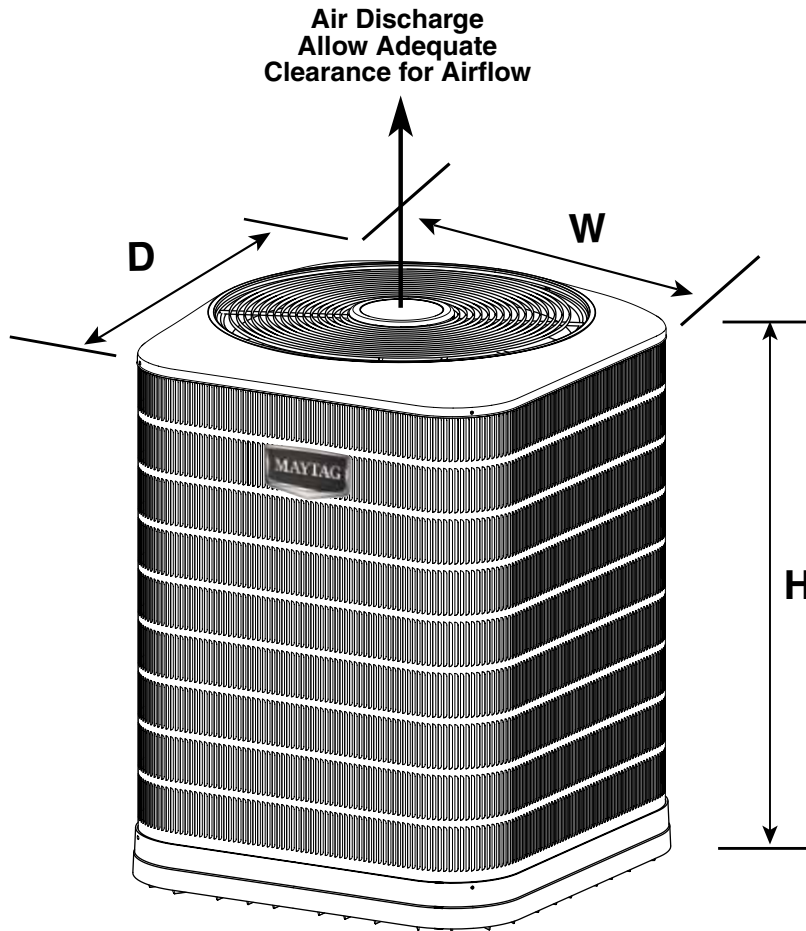

IDENTIFICATION CODE

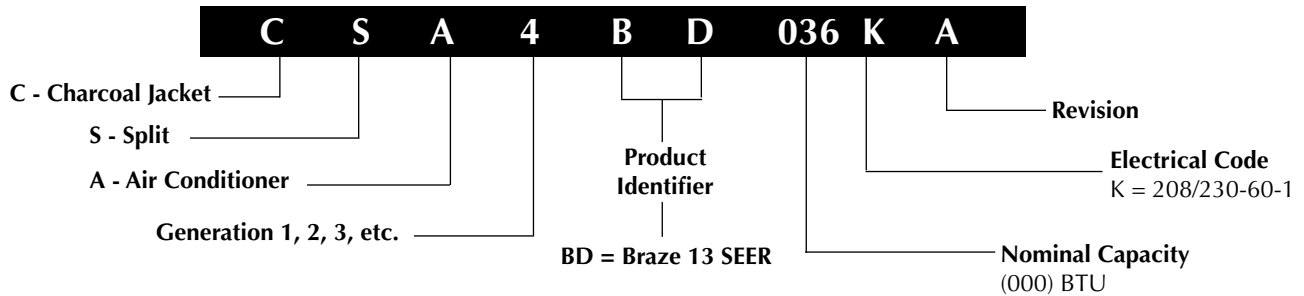

PHYSICAL AND ELECTRICAL SPECIFICATIONS/OUTDOOR UNITS

13 SEER — High Efficiency

Model Number CSA4BD		018KA	024KB	030KB	036KB	042KA	048KA	060KA	
Electrical Data	Volts-Cycles-Phase (1)	208/230-60-1	208/230-60-1	208/230-60-1	208/230-60-1	208/230-60-1	208/230-60-1	208/230-60-1	
	Total Amps	9.4	13.5	14.8	17.8	19.31	23.2	27.6	
	Delay Fuse Max. (2)	20	25	30	35	40	45	50	
	Min. Circuit Ampacity	11.5	16.7	18.3	22	23	28.6	34.2	
Condenser Data	Coil	Area	8.2	11.5	13.2	13.2	17.7	17.7	25.4
		Rows-FPI	1 - 22	1 - 16	1 - 16	1 - 16	1 - 22	1 - 22	2 - 16
		Tube Dia	3/8" O.D.	MC	MC	MC	3/8" O.D.	3/8" O.D.	3/8" O.D.
	Fan Motor	Type	PSC	PSC	PSC	PSC	PSC	PSC	PSC
		Amps	0.4	0.67	0.67	1.2	1.4	1.4	1.4
		HP	0.13	0.13	0.13	0.25	0.25	0.25	0.25
	Fan Blade	Dia-# Blades	18" - 3	18" - 3	18" - 3	18" - 3	24" - 2	24" - 2	24" - 2
		SCFM	2600	2800	3000	3000	3500	3500	3800
	Compressor Data	RLA	9	12.8	14.1	16.6	17.9	21.8	26.2
		LRA	48	58.3	73	79	112	117	134
Refrigerant suction line O.D.(all length of liquid line are 3/8" O.D.)		0-24 ft. 3/4"	3/4"	3/4"	3/4"	7/8"	7/8"	7/8"	
		25-39 ft. 3/4"	3/4"	3/4"	7/8" (3)	7/8"	7/8"	1-1/8" (4)	
		40-75 ft. 3/4"	3/4"	3/4"	7/8" (3)	7/8"	7/8"	1-1/8" (4)	
Refrigerant charge (R-410A) in ounces for outdoor unit, indoor unit and 15' lineset. (5)		75	70	76	72	124	127	160	
Weight	Net	109	125	138	140	184	184	219	
	Approximate (lbs.) Ship	114	130	144	146	196	196	228	

- (1) Operating Voltage Range: 187v min. — 253v max.
 (2) HACR Type Circuit Breakers may be used.
 (3) Requires 7/8" to 3/4" reducer from line to unit.
 (4) Requires 7/8" to 1-1/8" reducer from line to unit.
 (5) Additional charge for line sets above 15 feet.
 Values based on suction line as follows with 3/8" liquid line.
 a) 3/4" = 0.6 oz. per additional foot.
 b) 7/8" = 0.7 oz. per additional foot.
 c) 1 1/8" = 0.8 oz per additional foot.

COPPER WIRE SIZE — AWG (1% Voltage Drop)				
Supply Wire Length-Feet				Supply Circuit Ampacity
200	150	100	50	
6	8	10	14	15
4	6	8	12	20
4	6	8	10	25
4	4	6	10	30
3	4	6	8	35
3	4	6	8	40
2	3	4	6	45
2	3	4	6	50

Wire Size based on N.E.C. for 60° type copper conductors.

SYSTEM HEATING & COOLING CAPACITIES

13 SEER — High Efficiency — Single Phase

Outdoor Unit Model Number CSA4BD	Indoor Unit	BTUH	SEER	EER	SCFM
018KA	GB5BM-024K-(A,B) + TXV Kit - 2.0	18000	13	11.5	675
024KA/B	GB5BM-024K-(A,B) + TXV Kit - 2.0	24000	13	11.5	700
030KA/B	GB5BM-030K-(A,B) + TXV Kit - 2.5	29400	13	11.5	950
036KA/B	GB5BM-036K-B + TXV Kit - 3.0	34600	13	11.5	950
042KA	GB5BM-042K-B + TXV Kit - 3.5	40500	13	11.7	1250
048KA	GB5BM-048K-C + TXV Kit - 4.0	48000	13	11.5	1400
060KA	GB5BM-060K-C + TXV Kit - 5.0	58000	13	11.5	1600

See current AHRI Directory for certified combinations and ratings.

www.ahridirectory.org

Outdoor Unit Model Number CSA4BD-	Indoor Unit B5BM, PAH2BM	BTUH	SEER	EER	SCFM
018KA	X24K(A,B)	18000	13	11.5	675
024KA/B	X24K(A,B)	24000	13	11.5	700
030KA/B	X30K(A,B)	29400	13	11.5	950
036KA/B	X36K(A,B)	34600	13	11.5	950
042KA	X42KB	40500	13	11.7	1250
048KA	X48K(B,C)	48000	13	11.5	1400
060KA	X60KC	58000	13	11.5	1600

See current AHRI Directory for certified combinations and ratings.

www.ahridirectory.org

13 SEER — High Efficiency — Single Phase

Outdoor Unit Model Number CSA4BD-	Indoor Unit + TDR	BTUH	SEER	EER	SCFM
018KA	C6B(A,H)-X24(C,U)-(A,B)	18000	13	12	530
024KA/B	C6B(A,H)-X24(C,U)-(A,B)	24000	13	11.5	700
030KA/B	C6B(A,H)-X30(C,U)-(A,B)	28600	13	11	950
030KA/B	C6B(A,H)-X30(C,U)-C	28600	13	11.5	1000
036KA/B	C6B(A,H)-X35(C,U)-(A,B)	34600	13	11.5	950
036KA/B	C6B(A,H)-X36(C,U)-(B,C)	35600	13	11.3	1100
042KA	C6B(A,H)-X42(C,U)-(B,C)	40500	13	11.8	1250
048KA	C6B(A,H)-X47(C,U)-(B,C)	46500	13	11.2	1400
048KA	C6B(A,H)-X48(C,U)-(C,D)	46500	13	11.2	1400
060KA	C6B(A,H)-X60(C,U)-(C,D)	58500	13	11	1600

See current AHRI Directory for certified combinations and ratings.

www.ahridirectory.org

14 SEER — High Efficiency — Single Phase

Outdoor Unit Model Number CSA4BD-	Indoor Unit B4VM, PAH4VM	BTUH	SEER	EER	SCFM
018KA	X24K(A,B)	18400	14	12.5	550
024KA/B	X24K(A,B)	24400	14	12.5	700
030KA/B	X30K(A,B)	30000	14	12.5	950
036KA/B	X36KB	35200	14	12.5	950
042KA	X48K(B,C)	41000	14	12.5	1250
048KA	X48KC	48500	14	12.5	1400
060KA	X60KC	59000	14	12.5	1600

See current AHRI Directory for certified combinations and ratings.

www.ahridirectory.org

ACCESSORIES - CONDENSING UNIT

Start Assist Kit - 912933

Provides additional starting torque for the compressor motor when operating with low line voltage or high operating temperatures.

Fan Delay Kit (TDR)

911758 - 80 second fan delay

COMFORT ALERT™ DIAGNOSTIC MODULE

Green POWER LED Indicates Voltage Is Present At The Power Connection Of The Module

Yellow ALERT LED Flashes To Indicate Fault Code

Red TRIP LED Indicates If Compressor Is Tripped Or Has No Power



Pass Through Ports Detect Run/Start Current; Spade Connectors Detect Tstat Demand and Pilot Voltage; Microprocessor Monitors Behavior To Determine Faults

Diagnostics Key Directs Service Tech To The Root Cause Of A Problem

13 SEER COOLING EXPANDED RATINGS

CSA4BD018KA with C6B(A,H)-X24(C,U)-(A,B)+TDR
 CSA4BD018KA with C6B(A,H)-X24(C,U)-(A,B)+MB6B(*)-(A,B)
 CSA4BD018KA with PAH2BMX24K(A,B), or B5BMX24K-(A,B), or GB5BM-024K-(A,B) + TXV Kit

CFM	O.D.T		75°F			85°F			95°F			105°F			115°F		
	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
475	80	62	18.7	15.2	1.27	17.8	14.9	1.41	16.9	14.6	1.57	15.8	14.4	1.75	14.7	13.8	1.96
	80	67	20.3	12.9	1.27	19.4	12.6	1.42	18.3	12.1	1.58	17.2	11.6	1.77	15.9	11.1	1.97
	80	72	22.4	10.5	1.28	21.3	10.2	1.43	20.1	9.7	1.60	18.8	9.3	1.78	17.2	8.8	1.98
	75	63	18.8	12.6	1.27	18.0	12.2	1.41	17.0	11.7	1.58	15.9	11.3	1.76	14.8	10.7	1.96
525	80	62	19.0	16.0	1.29	18.2	15.7	1.43	17.2	15.6	1.59	16.1	15.2	1.78	15.0	14.7	1.98
	80	67	20.7	13.5	1.29	19.7	13.1	1.44	18.6	12.7	1.60	17.4	12.2	1.79	16.1	11.6	1.99
	80	72	22.7	10.9	1.30	21.6	10.5	1.45	20.2	10.1	1.62	18.9	9.6	1.80	17.4	9.1	2.00
	75	63	19.2	13.1	1.29	18.3	12.7	1.43	17.3	12.3	1.60	16.2	11.8	1.78	15.0	11.2	1.98
575	80	62	19.2	17.1	1.32	18.5	16.7	1.45	17.5	16.3	1.62	16.4	16.1	1.80	15.2	15.2	2.00
	80	67	21.0	14.1	1.31	20.0	13.7	1.46	18.9	13.2	1.63	17.7	12.7	1.81	16.3	12.2	2.01
	80	72	22.8	11.3	1.32	21.6	10.9	1.47	20.4	10.5	1.64	19.1	10.0	1.82	17.6	9.4	2.03
	75	63	19.5	13.6	1.31	18.6	13.3	1.45	17.5	12.8	1.62	16.4	12.3	1.80	15.2	11.7	2.00

CSA4BD024KB with C6B(A,H)-X24(C,U)-(A,B)+TDR
 CSA4BD024KB with C6B(A,H)-X24(C,U)-(A,B)+MB6B(*)-(A,B)
 CSA4BD024KB with PAH2BMX24K(A,B), or B5BM-X24K-(A,B), or GB5BM-024K-(A,B) + TXV Kit

CFM	O.D.T		75°F			85°F			95°F			105°F			115°F		
	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
600	80	62	24.2	19.5	1.66	23.1	19.1	1.85	22.0	18.8	2.06	20.7	18.6	2.30	19.3	17.9	2.57
	80	67	26.3	16.6	1.67	25.0	16.1	1.87	23.8	15.6	2.08	22.4	15.0	2.32	20.9	14.4	2.59
	80	72	28.9	13.5	1.68	27.6	13.1	1.88	26.2	12.6	2.10	24.7	12.0	2.34	22.9	11.5	2.61
	75	63	24.4	16.2	1.67	23.3	15.7	1.86	22.2	15.2	2.07	20.9	14.5	2.31	19.5	13.9	2.58
700	80	62	24.9	21.1	1.70	23.8	20.7	1.90	22.6	20.6	2.11	21.3	20.1	2.35	19.9	19.5	2.62
	80	67	27.0	17.8	1.71	25.7	17.3	1.91	24.4	16.7	2.12	23.0	16.1	2.36	21.4	15.5	2.63
	80	72	29.5	14.3	1.72	28.1	13.8	1.93	26.5	13.3	2.14	24.7	12.7	2.38	23.0	12.1	2.65
	75	63	25.1	17.2	1.71	23.9	16.7	1.90	22.7	16.2	2.11	21.4	15.6	2.35	19.9	14.9	2.62
800	80	62	25.3	23.0	1.76	24.3	22.4	1.94	23.1	22.0	2.15	21.8	21.6	2.39	20.4	20.4	2.66
	80	67	27.5	18.9	1.75	26.2	18.4	1.95	24.8	17.8	2.16	23.3	17.2	2.40	21.7	16.5	2.67
	80	72	29.7	15.0	1.76	28.2	14.5	1.96	26.7	14.0	2.18	25.1	13.4	2.42	23.4	12.7	2.69
	75	63	25.7	18.3	1.75	24.4	17.8	1.94	23.1	17.2	2.15	21.7	16.6	2.39	20.2	15.9	2.66

CSA4BD030KB with C6B(A,H)-X30(C,U)-(A,B,C)+TDR
 CSA4BD030KB with C6B(A,H)-X30(C,U)-(A,B,C)+MB6B(*)-(A,B,C)
 CSA4BD030KB with PAH2BMX30K(A,B), or B5BM-X30K-(A,B), or GB5BM-030K-(A,B) + TXV Kit

CFM	O.D.T		75°F			85°F			95°F			105°F			115°F		
	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
850	80	62	29.8	25.6	2.02	28.5	25.1	2.26	26.9	24.6	2.50	25.3	24.3	2.79	23.5	23.2	3.11
	80	67	32.4	21.5	2.03	30.8	20.9	2.27	29.2	20.2	2.52	27.3	19.5	2.80	25.2	18.6	3.12
	80	72	35.3	17.2	2.05	33.7	16.6	2.29	31.8	16.0	2.53	29.7	15.3	2.82	27.3	14.5	3.14
	75	63	30.1	20.9	2.03	28.7	20.3	2.26	27.1	19.6	2.51	25.4	18.8	2.79	23.5	18.0	3.11
950	80	62	30.4	27.1	2.06	29.0	26.6	2.30	27.5	26.3	2.54	25.8	25.5	2.83	24.1	24.1	3.15
	80	67	32.9	22.6	2.07	31.3	22.0	2.31	29.6	21.3	2.56	27.7	20.6	2.84	25.6	19.7	3.16
	80	72	35.7	17.9	2.08	34.0	17.4	2.33	32.0	16.7	2.57	29.9	16.0	2.86	27.6	15.2	3.18
	75	63	30.6	21.9	2.07	29.2	21.3	2.30	27.6	20.6	2.55	25.7	19.8	2.83	23.8	19.0	3.15
1050	80	62	30.8	28.9	2.12	29.5	28.2	2.34	28.0	27.4	2.58	26.4	26.4	2.87	24.7	24.7	3.19
	80	67	33.3	23.8	2.12	31.7	23.1	2.35	29.9	22.4	2.60	28.0	21.6	2.88	25.8	20.8	3.20
	80	72	36.1	18.7	2.13	34.2	18.1	2.37	32.3	17.4	2.62	30.2	16.7	2.90	27.8	15.8	3.22
	75	63	31.1	23.0	2.11	29.5	22.4	2.34	27.9	21.6	2.59	26.0	20.8	2.87	24.0	19.9	3.19

CSA4BD036KB with C6B(A,H)-X36(C,U)-(B,C)+TDR
 CSA4BD036KB with C6B(A,H)-X36(C,U)-(B,C)+MB6B(*)-(B,C)
 CSA4BD036KB with PAH2BMX36K(A,B), or B5BM-X36K-(A,B), or GB5BM-036K-B + TXV Kit

CFM	O.D.T		75°F			85°F			95°F			105°F			115°F		
	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1000	80	62	36.7	31.0	2.52	35.0	30.4	2.81	33.1	29.8	3.11	31.0	29.4	3.46	28.7	28.2	3.85
	80	67	39.9	26.2	2.53	38.0	25.4	2.83	35.9	24.6	3.13	33.6	23.6	3.47	31.1	22.6	3.87
	80	72	43.7	21.0	2.55	41.7	20.3	2.86	39.4	19.5	3.16	36.7	18.6	3.50	33.9	17.6	3.89
	75	63	37.1	25.4	2.53	35.4	24.6	2.81	33.4	23.8	3.11	31.2	22.8	3.46	28.9	21.8	3.85
1100	80	62	37.3	32.6	2.56	35.6	32.0	2.85	33.7	31.7	3.15	31.5	30.9	3.50	29.4	29.4	3.89
	80	67	40.5	27.3	2.57	38.6	26.6	2.87	36.4	25.7	3.17	34.0	24.8	3.52	31.4	23.7	3.91
	80	72	44.3	21.7	2.59	42.2	21.0	2.90	39.7	20.2	3.20	37.0	19.3	3.54	34.0	18.4	3.93
	75	63	37.7	26.5	2.57	35.9	25.8	2.86	33.9	24.9	3.15	31.6	23.9	3.50	29.2	22.8	3.89
1200	80	62	37.7	34.7	2.63	36.2	33.9	2.89	34.2	33.1	3.19	32.1	32.1	3.54	30.0	30.0	3.93
	80	67	41.1	28.5	2.62	39.1	27.8	2.91	36.8	26.9	3.21	34.4	25.9	3.56	31.7	24.8	3.95
	80	72	44.7	22.5	2.64	42.5	21.8	2.94	39.9	21.0	3.24	37.2	20.0	3.58	34.3	19.0	3.97
	75	63	38.2	27.6	2.61	36.4	26.8	2.90	34.3	25.9	3.20	32.0	24.9	3.54	29.5	23.9	3.93

13 SEER COOLING EXPANDED RATINGS (Continued)

CSA4BD042KA with C6B(A,H)-X42(C,U)-(B,C,D)+TDR
 CSA4BD042KA with C6B(A,H)-X42(C,U)-(B,C)+MB6B(*)-(B,C)
 CSA4BD042KA with PAH2BMX42KB, or B5BM-X42K-B, or GB5BM-042K-B + TXV Kit

CFM	O.D.T		75°F			85°F			95°F			105°F			115°F		
	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1150	80	62	41.2	34.9	2.78	39.3	34.2	3.10	37.2	33.5	3.44	35.0	33.1	3.82	32.6	31.8	4.25
	80	67	44.7	29.3	2.78	42.5	28.5	3.11	40.3	27.5	3.44	37.7	26.5	3.83	35.1	25.4	4.27
	80	72	48.6	23.6	2.79	46.4	22.8	3.12	43.7	21.9	3.45	40.6	20.9	3.84	37.8	19.9	4.27
	75	63	41.6	28.5	2.79	39.6	27.7	3.10	37.5	26.7	3.44	35.2	25.7	3.83	32.7	24.6	4.26
1250	80	62	41.8	36.4	2.82	39.9	35.7	3.14	37.8	35.4	3.47	35.5	34.5	3.86	33.1	33.1	4.30
	80	67	45.2	30.4	2.82	43.1	29.6	3.15	40.7	28.6	3.48	38.1	27.5	3.87	35.4	26.4	4.31
	80	72	48.9	24.3	2.83	46.5	23.5	3.16	43.8	22.6	3.49	41.0	21.6	3.88	38.1	20.5	4.31
	75	63	42.1	29.6	2.82	40.2	28.7	3.14	37.9	27.7	3.48	35.5	26.7	3.86	33.0	25.5	4.30
1350	80	62	42.1	38.5	2.88	40.4	37.5	3.17	38.3	36.7	3.51	36.0	35.9	3.90	33.7	33.7	4.34
	80	67	45.7	31.5	2.86	43.5	30.7	3.18	41.1	29.7	3.52	38.4	28.6	3.91	35.7	27.5	4.34
	80	72	49.3	25.0	2.87	46.8	24.2	3.20	44.2	23.3	3.53	41.3	22.2	3.92	38.3	21.1	4.35
	75	63	42.6	30.6	2.87	40.6	29.7	3.18	38.3	28.7	3.52	35.8	27.6	3.90	33.2	26.5	4.34

CSA4BD048KA with C6B(A,H)-X48(C,U)-C+TDR
 CSA4BD048KA with C6B(A,H)-X48(C,U)-C+MB6B(*)-C
 CSA4BD048KA with PAH2BMX48K(B,C), or B5BM-X48K-(B,C), or GB5BM-048K-C + TXV Kit

CFM	O.D.T		75°F			85°F			95°F			105°F			115°F		
	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1300	80	62	48.6	40.7	3.30	46.3	39.9	3.68	43.8	39.2	4.09	41.0	38.7	4.57	38.1	37.2	5.11
	80	67	52.7	34.3	3.31	50.2	33.3	3.70	47.5	32.2	4.10	44.4	31.0	4.58	41.1	29.7	5.12
	80	72	57.5	27.4	3.32	54.8	26.5	3.71	51.8	25.5	4.12	48.4	24.3	4.59	44.7	23.1	5.13
	75	63	49.1	33.4	3.31	46.8	32.4	3.68	44.3	31.3	4.09	41.4	30.1	4.57	38.3	28.8	5.12
1400	80	62	49.2	42.4	3.34	46.9	41.6	3.72	44.3	41.2	4.13	41.5	40.2	4.61	38.6	38.6	5.15
	80	67	53.3	35.5	3.34	50.8	34.5	3.73	48.0	33.4	4.14	44.8	32.1	4.62	41.5	30.8	5.16
	80	72	58.1	28.2	3.36	55.3	27.3	3.75	52.2	26.2	4.16	48.7	25.1	4.63	45.0	23.9	5.17
	75	63	49.7	34.5	3.35	47.4	33.6	3.72	44.7	32.4	4.13	41.8	31.2	4.61	38.7	29.8	5.16
1500	80	62	49.4	44.7	3.41	47.5	43.6	3.75	44.9	42.7	4.16	42.1	41.9	4.65	39.3	39.3	5.19
	80	67	53.9	36.6	3.40	51.3	35.7	3.77	48.4	34.5	4.18	45.2	33.3	4.65	41.8	32.0	5.20
	80	72	58.7	29.0	3.40	55.7	28.1	3.79	52.5	27.0	4.19	49.0	25.8	4.67	45.2	24.6	5.20
	75	63	50.3	35.6	3.39	47.8	34.7	3.76	45.1	33.5	4.17	42.2	32.2	4.65	38.9	30.9	5.19

CSA4BD060KA with C6B(A,H)-X60(C,U)-C+TDR
 CSA4BD060KA with C6B(A,H)-X60(C,U)-C+MB6B(*)-C
 CSA4BD060KA with PAH2BMX60KC, or B5BM-X60K-C, or GB5BM-060K-C + TXV Kit

CFM	O.D.T		75°F			85°F			95°F			105°F			115°F		
	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1500	80	62	58.9	47.3	4.03	56.2	46.4	4.48	53.3	45.5	4.97	50.2	44.9	5.52	46.5	42.8	6.17
	80	67	63.6	40.3	4.05	60.6	39.1	4.52	57.5	37.7	5.02	54.1	36.1	5.58	49.9	34.3	6.23
	80	72	69.7	33.0	4.09	66.4	31.9	4.58	62.6	30.6	5.08	58.2	29.2	5.63	53.2	27.4	6.29
	75	63	59.2	39.3	4.03	56.5	38.2	4.49	53.6	36.8	4.98	50.5	35.1	5.53	46.5	33.3	6.18
1600	80	62	59.6	48.8	4.07	56.9	47.9	4.53	53.9	47.5	5.02	50.8	46.3	5.57	46.9	44.7	6.22
	80	67	64.3	41.4	4.09	61.3	40.2	4.57	58.1	38.6	5.06	54.6	37.1	5.62	50.3	35.2	6.28
	80	72	69.9	33.7	4.14	66.6	32.6	4.62	62.3	31.3	5.11	58.3	29.8	5.67	53.5	27.9	6.34
	75	63	60.0	40.2	4.08	57.2	39.0	4.54	54.2	37.6	5.02	50.9	36.1	5.57	46.9	34.2	6.23
1700	80	62	59.8	51.2	4.15	57.5	49.9	4.57	54.5	48.9	5.06	51.3	48.2	5.61	47.4	45.9	6.27
	80	67	65.1	42.2	4.15	61.9	41.1	4.61	58.6	39.7	5.11	55.0	38.1	5.66	50.6	36.2	6.32
	80	72	69.8	34.3	4.18	66.3	33.2	4.66	62.6	31.8	5.15	58.7	30.4	5.71	53.9	28.5	6.39
	75	63	60.7	41.2	4.13	57.7	40.0	4.58	54.6	38.6	5.07	51.3	37.0	5.62	47.2	35.1	6.27

13 SEER + VSB COOLING EXPANDED RATINGS

CSA4BD018KA with C6B(A,H)-X24(C,U)-(A,B)+VSB
CSA4BD018KA with PAH4VMX24K(A,B), or B4VM-X24K-(A,B)

CFM	O.D.T			75°F			85°F			95°F			105°F			115°F		
	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	
500	80	62	19.1	15.6	1.17	18.2	15.3	1.30	17.2	15.0	1.46	16.2	14.8	1.64	15.1	14.2	1.85	
	80	67	20.7	13.3	1.17	19.8	12.9	1.31	18.7	12.5	1.47	17.6	12.0	1.65	16.3	11.5	1.86	
	80	72	22.8	10.9	1.18	21.7	10.5	1.32	20.5	10.1	1.49	19.2	9.7	1.67	17.6	9.2	1.87	
	75	63	19.4	12.9	1.17	18.4	12.6	1.30	17.4	12.1	1.46	16.3	11.6	1.65	15.2	11.1	1.85	
550	80	62	19.4	16.4	1.19	18.5	16.1	1.32	17.6	16.0	1.48	16.5	15.6	1.67	15.3	15.1	1.87	
	80	67	21.1	13.9	1.19	20.1	13.5	1.33	19.0	13.1	1.49	17.8	12.6	1.68	16.5	12.0	1.88	
	80	72	23.1	11.3	1.20	22.0	10.9	1.34	20.6	10.5	1.51	19.4	10.0	1.69	17.8	9.5	1.89	
	75	63	19.6	13.5	1.19	18.7	13.1	1.32	17.7	12.7	1.49	16.6	12.2	1.67	15.4	11.6	1.87	
600	80	62	19.6	17.5	1.22	18.9	17.1	1.34	17.8	16.7	1.50	16.8	16.5	1.68	15.6	15.6	1.89	
	80	67	21.4	14.5	1.21	20.4	14.1	1.35	19.3	13.6	1.51	18.0	13.1	1.70	16.7	12.6	1.90	
	80	72	23.2	11.7	1.22	22.0	11.3	1.36	20.8	10.8	1.53	19.4	10.3	1.71	18.0	9.8	1.91	
	75	63	19.9	14.0	1.21	19.0	13.6	1.34	17.9	13.2	1.51	16.8	12.7	1.69	15.5	12.1	1.89	

CSA4BD024KB with C6B(A,H)-X24(C,U)-(A,B)+VSB
CSA4BD024KB with PAH4VMX24K(A,B), or B4VM-X24K-(A,B)

CFM	O.D.T			75°F			85°F			95°F			105°F			115°F		
	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	
600	80	62	36.7	20.0	1.54	23.6	19.6	1.71	22.4	19.4	1.94	21.2	19.0	2.16	19.8	18.3	2.43	
	80	67	26.8	17.1	1.54	25.5	16.6	1.73	36.3	16.1	1.94	22.9	15.5	2.18	21.4	14.9	2.45	
	80	72	29.4	14.0	1.56	28.1	13.5	1.74	26.7	13.1	1.96	25.1	12.5	2.20	23.4	11.9	2.47	
	75	63	36.9	16.6	1.54	23.8	16.2	1.72	22.6	15.6	1.93	21.4	15.0	2.17	20.0	14.4	2.44	
700	80	62	25.4	21.6	1.58	36.3	21.2	1.76	23.1	21.0	1.97	21.8	20.6	2.21	20.4	20.0	2.48	
	80	67	27.5	18.3	1.58	26.2	17.8	1.77	36.6	17.2	1.98	23.4	16.6	2.22	21.9	15.9	2.49	
	80	72	30.0	14.8	1.60	28.6	14.3	1.79	27.0	13.8	2.00	25.2	13.2	2.24	23.5	12.6	2.51	
	75	63	25.6	17.7	1.58	36.4	17.2	1.76	23.2	16.7	1.97	21.9	16.1	2.21	20.4	15.4	2.48	
800	80	62	25.8	23.5	1.63	36.8	22.9	1.80	23.6	22.5	2.01	22.3	22.1	2.37	20.9	20.9	2.52	
	80	67	28.0	19.4	1.63	26.7	18.9	1.81	25.3	18.3	2.02	23.8	17.7	2.26	22.2	17.0	2.53	
	80	72	30.2	15.5	1.64	28.7	15.0	1.82	27.2	14.4	2.04	25.6	13.9	2.28	23.8	13.2	2.55	
	75	63	26.2	18.8	1.62	36.9	18.4	1.80	23.6	17.7	2.01	22.2	17.0	2.25	20.7	16.3	2.52	

CSA4BD030KB with C6B(A,H)-X30(C,U)-(A,B,C)+VSB
CSA4BD030KB with PAH4VMX30K(A,B), or B4VM-X30K-(A,B)

CFM	O.D.T			75°F			85°F			95°F			105°F			115°F		
	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	
850	80	62	30.5	26.2	1.86	29.1	25.7	2.08	27.5	25.2	2.32	25.9	36.9	2.61	36.1	23.8	2.93	
	80	67	33.0	22.1	1.87	31.4	21.5	2.09	29.8	20.8	2.34	27.9	20.1	2.62	25.9	19.4	2.95	
	80	72	36.0	17.8	1.89	34.3	17.2	2.11	32.4	16.6	2.36	30.3	15.9	2.64	27.9	15.1	2.96	
	75	63	30.7	21.5	1.87	29.3	20.9	2.08	27.8	20.2	2.33	26.0	19.4	2.61	36.1	18.6	2.93	
950	80	62	31.1	27.7	1.90	29.6	27.2	2.12	28.1	26.9	2.36	26.4	26.1	2.65	36.7	36.7	2.97	
	80	67	33.5	23.3	1.91	31.9	22.6	2.13	30.2	21.9	2.38	28.3	21.2	2.66	26.2	20.3	2.99	
	80	72	36.3	18.6	1.93	34.6	18.0	2.15	32.6	17.3	2.40	30.5	16.6	2.68	28.2	15.8	3.00	
	75	63	31.3	22.6	1.91	29.8	21.9	2.12	28.2	21.2	2.37	26.3	20.4	2.65	36.4	19.6	2.97	
1050	80	62	31.4	29.5	1.96	30.2	28.8	2.16	28.6	28.0	2.40	27.0	27.0	2.69	25.3	25.3	3.02	
	80	67	34.0	26.4	1.96	32.3	23.7	2.18	30.5	23.0	2.42	28.6	22.2	2.70	26.4	21.4	3.04	
	80	72	36.7	19.3	1.97	34.8	18.7	2.19	32.9	18.0	2.44	30.8	17.3	2.72	28.4	16.5	3.04	
	75	63	31.7	23.6	1.95	30.2	23.0	2.16	28.5	22.2	2.41	26.6	21.4	2.69	36.6	20.5	3.01	

CSA4BD036KB with C6B(A,H)-X36(C,U)-(B,C)+VSB
CSA4BD036KB with PAH4VMX36K(B), or B4VM-X36K-B

CFM	O.D.T			75°F			85°F			95°F			105°F			115°F		
	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	
1000	80	62	37.3	31.5	2.38	35.5	30.9	2.65	33.6	30.4	2.95	31.5	30.0	3.30	29.3	28.7	3.69	
	80	67	40.5	26.7	2.39	38.6	26.0	2.67	36.5	25.1	2.97	34.1	36.2	3.32	31.6	23.1	3.71	
	80	72	44.3	21.5	2.41	42.2	20.8	2.70	39.9	20.0	3.00	37.3	19.1	3.34	34.4	18.2	3.73	
	75	63	37.7	25.9	2.39	35.9	25.2	2.66	34.0	36.3	2.96	31.8	23.4	3.31	29.4	22.3	3.69	
1100	80	62	37.9	33.2	2.42	36.2	32.5	2.69	34.2	32.3	2.99	32.1	31.4	3.34	29.9	29.9	3.73	
	80	67	41.1	27.9	2.43	39.1	27.1	2.72	37.0	26.3	3.01	34.6	25.3	3.36	31.9	36.3	3.75	
	80	72	44.9	22.3	2.45	42.7	21.6	2.74	40.2	20.8	3.04	37.5	19.9	3.39	34.6	18.9	3.77	
	75	63	38.3	27.1	2.43	36.5	26.3	2.70	34.4	25.4	3.00	32.2	36.4	3.34	29.7	23.4	3.73	
1200	80	62	38.2	35.3	2.48	36.7	34.4	2.73	34.7	33.7	3.03	32.7	32.7	3.38	30.6	30.6	3.78	
	80	67	41.6	29.1	2.48	39.6	28.3	2.76	37.4	27.4	3.05	34.9	26.4	3.40	32.2	25.4	3.79	
	80	72	45.3	23.1	2.50	43.0	22.3	2.78	40.5	21.5	3.08	37.8	20.6	3.43	34.8	19.6	3.81	
	75	63	38.8	28.1	2.47	36.9	27.4	2.74	34.8	26.5	3.04	32.5	25.5	3.38	30.0	36.4	3.77	

13 SEER + VSB COOLING EXPANDED RATINGS (Continued)

CSA4BD042KA with C6B(A,H)-X42(C,U)-(B,C,D)+VSB
 CSA4BD042KA with PAH4VMX48K(B,C), or B4VM-X48K-(B,C)

CFM	O.D.T		75°F			85°F			95°F			105°F			115°F		
	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1150	80	62	42.1	35.7	2.56	40.2	35.0	2.85	38.1	34.4	3.19	35.8	34.0	3.57	33.5	32.6	4.00
	80	67	45.5	30.2	2.56	43.4	29.3	2.86	41.1	28.4	3.19	38.6	27.3	3.58	35.9	26.2	4.02
	80	72	49.5	36.5	2.56	47.2	23.6	2.87	44.6	22.8	3.20	41.5	21.8	3.59	38.6	20.7	4.02
	75	63	42.5	29.4	2.56	40.5	28.5	2.85	38.4	27.6	3.19	36.0	26.5	3.58	33.5	25.4	4.01
1250	80	62	42.7	37.3	2.60	40.8	36.5	2.89	38.6	36.2	3.22	36.3	35.3	3.61	34.0	34.0	4.05
	80	67	46.1	31.3	2.59	43.9	30.4	2.90	41.4	29.5	3.23	39.0	28.4	3.62	36.3	27.3	4.06
	80	72	49.8	25.2	2.61	47.4	36.4	2.91	44.7	23.5	3.36	41.9	22.4	3.63	38.9	21.4	4.06
	75	63	43.0	30.4	2.60	41.0	29.6	2.89	38.8	28.6	3.23	36.4	27.5	3.61	33.8	26.4	4.05
1350	80	62	43.0	39.4	2.66	41.3	38.4	2.94	39.1	37.6	3.26	36.8	36.8	3.65	34.6	34.6	4.09
	80	67	46.6	32.4	2.64	44.3	31.5	2.93	41.9	30.5	3.27	39.3	29.4	3.66	36.5	28.3	4.09
	80	72	50.2	25.9	2.65	47.6	25.0	2.95	45.0	36.1	3.28	42.2	23.1	3.67	39.2	22.0	4.10
	75	63	43.5	31.5	2.64	41.4	30.6	2.93	39.1	29.6	3.27	36.7	28.5	3.65	34.1	27.3	4.09

CSA4BD048KA with C6B(A,H)-X48(C,U)-(C,D)+VSB
 CSA4BD048KA with PAH4VMX48KC, or B4VM-X48K-C

CFM	O.D.T		75°F			85°F			95°F			105°F			115°F		
	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1300	80	62	49.5	41.6	3.07	47.2	40.8	3.42	44.7	40.1	3.83	41.9	39.6	4.31	39.0	38.0	4.86
	80	67	53.6	35.2	3.08	51.1	34.2	3.44	48.3	33.1	3.84	45.3	31.9	4.32	42.0	30.6	4.87
	80	72	58.4	28.3	3.09	55.7	27.4	3.46	52.6	26.3	3.86	49.3	25.2	4.33	45.6	36.0	4.87
	75	63	50.0	34.3	3.08	47.7	33.3	3.43	45.1	32.2	3.84	42.3	31.0	4.32	39.2	29.7	4.86
1400	80	62	50.1	43.3	3.11	47.8	42.4	3.46	45.2	42.1	3.87	42.4	41.1	4.35	39.5	39.5	4.89
	80	67	54.4	36.4	3.11	51.7	35.4	3.48	48.9	34.3	3.88	45.7	33.0	4.36	42.3	31.7	4.90
	80	72	59.0	29.1	3.13	56.1	28.2	3.49	53.1	27.1	3.90	49.6	26.0	4.37	45.9	36.8	4.91
	75	63	50.7	35.4	3.12	48.3	34.4	3.47	45.6	33.3	3.87	42.7	32.0	4.36	39.5	30.7	4.90
1500	80	62	50.3	45.6	3.18	48.3	44.5	3.50	45.7	43.6	3.91	43.0	42.7	4.39	40.2	40.2	4.93
	80	67	54.8	37.5	3.16	52.1	36.5	3.52	49.3	35.4	3.92	46.1	34.2	4.40	42.6	32.8	4.94
	80	72	59.6	29.9	3.17	56.6	28.9	3.53	53.4	27.9	3.94	49.9	26.7	4.41	46.1	25.5	4.95
	75	63	51.2	36.5	3.16	48.7	35.5	3.50	46.0	34.4	3.91	43.0	33.1	4.39	39.8	31.8	4.94

CSA4BD060KA with C6B(A,H)-X60(C,U)-(C,D)+VSB
 CSA4BD060KA with PAH4VMX60KC, or B4VM-X60K-C

CFM	O.D.T		75°F			85°F			95°F			105°F			115°F		
	E.D.B.	E.W.B.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.	T.C.	S.C.	K.W.
1500	80	62	59.7	48.0	3.84	56.9	47.1	4.28	54.0	46.2	4.76	50.9	45.6	5.31	47.2	43.6	5.97
	80	67	64.3	41.0	3.86	61.3	39.8	4.32	58.2	38.5	4.81	54.8	36.8	5.37	50.6	35.0	6.03
	80	72	70.4	33.7	3.91	67.2	32.6	4.37	63.3	31.3	4.87	58.9	29.9	5.42	53.9	28.1	6.08
	75	63	59.9	40.0	3.85	57.2	38.9	4.28	54.3	37.5	4.77	51.2	35.8	5.32	47.3	34.0	5.98
1600	80	62	60.3	49.5	3.89	57.6	48.6	4.32	54.7	48.2	4.81	51.5	47.0	5.36	47.7	45.4	6.02
	80	67	65.1	42.1	3.90	62.0	41.0	4.36	58.8	39.4	4.85	55.3	37.8	5.41	51.0	35.9	6.07
	80	72	70.7	34.4	3.95	67.3	33.3	4.41	63.0	32.0	4.90	59.0	30.5	5.46	54.4	28.6	6.14
	75	63	60.8	40.9	3.89	57.9	39.7	4.33	54.9	38.3	4.82	51.6	36.8	5.37	47.6	34.9	6.02
1700	80	62	60.6	51.9	3.96	58.2	50.6	4.36	55.2	49.6	4.85	52.0	48.9	5.40	48.1	46.7	6.06
	80	67	65.8	43.0	3.96	62.6	41.8	4.40	59.3	40.4	4.90	55.7	38.8	5.45	51.3	36.9	6.11
	80	72	70.6	35.1	3.99	67.0	34.0	4.45	63.3	32.6	4.95	59.4	31.1	5.50	54.6	29.2	6.18
	75	63	61.4	41.9	3.94	58.4	40.7	4.37	55.4	39.3	4.86	52.0	37.7	5.41	48.0	35.8	6.06



MAYTAG

Before purchasing this appliance, read important energy cost and efficiency information available from your retailer. Specifications and illustrations subject to change without notice and without incurring obligations.

Manufactured under license by NORDYNE, O'Fallon, MO. ©Registered Trademark/™ Trademark of Maytag Corporation or its related companies. ©2010. All rights reserved.
287D-0410 (Replaces 287D-0310)

Printed in U.S.A. (04/10)