

# WIRING DIAGRAM


H3HK020H-01B (Without Circuit Breaker)

20 kW, 240 VAC, 1-Phase Electric Heater Kit

H3HK020H-21B (With Circuit Breaker)

H4HK020H-21B (With Circuit Breaker)

H4HK025H-21B (With Circuit Breaker)

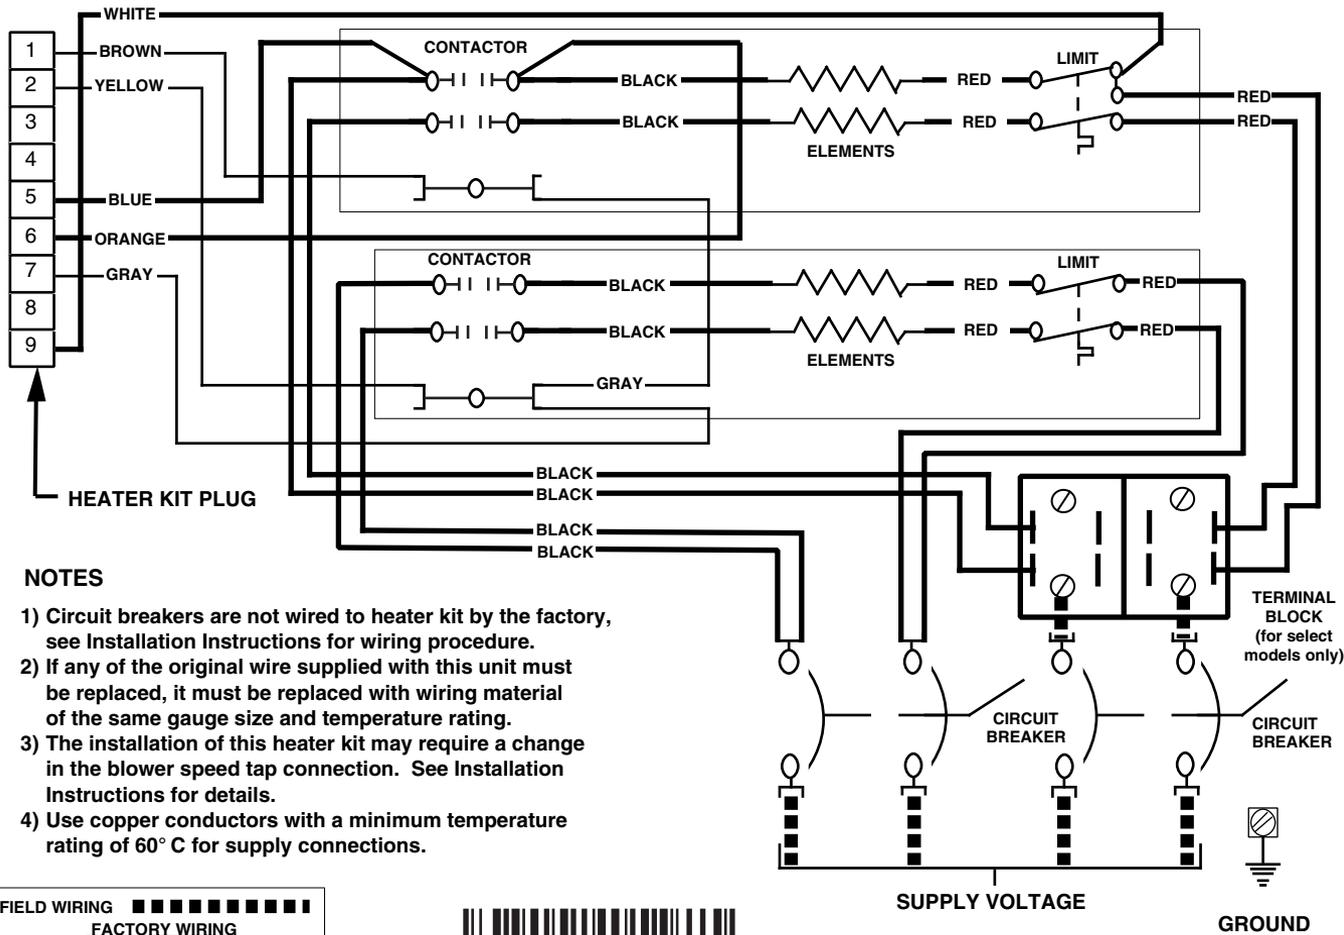

## NOTES

- 1) Circuit breakers are not wired to heater kit by the factory, see Installation Instructions for wiring procedure.
- 2) If any of the original wire supplied with this unit must be replaced, it must be replaced with wiring material of the same gauge size and temperature rating.
- 3) The installation of this heater kit may require a change in the blower speed tap connection. See Installation Instructions for details.
- 4) Use copper conductors with a minimum temperature rating of 60° C for supply connections.

FIELD WIRING	■ ■ ■ ■ ■ ■ ■ ■ ■ ■
FACTORY WIRING	— — — — —
LOW VOLTAGE	— — — — —
HIGH VOLTAGE	— — — — —

